




> APR600

Excellent sensitivity and receptor multi compatibility
 very good printing quality at high speed and sharpness of 90°
 Very high resistance to smudge


APR® 600 is the worldwide reference of premium ribbons for Corner Edge and Near Edge printers. It is the standard ribbon in inkanto's wax/resin range. Its performance (speed, sensitivity, versatility, blackness) provides a perfectly adapted answer to a large majority of applications.

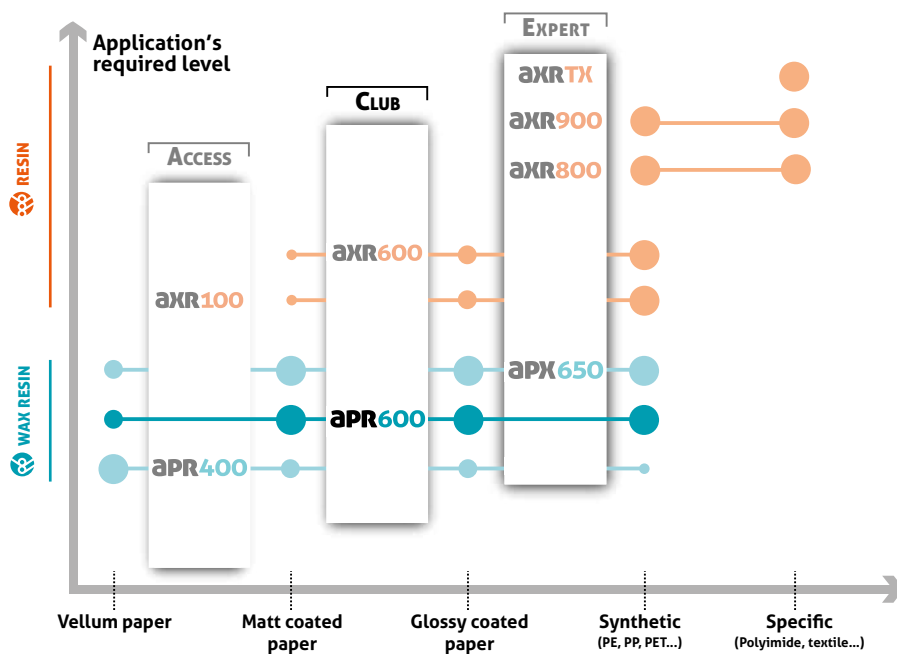


Printing receptor

papers		synthetics	
Vellum	● ● ○	PP	● ● ●
Coated	● ● ●	PE	● ● ●
Glossy coated	● ● ●	PET	● ● ●

Printer settings

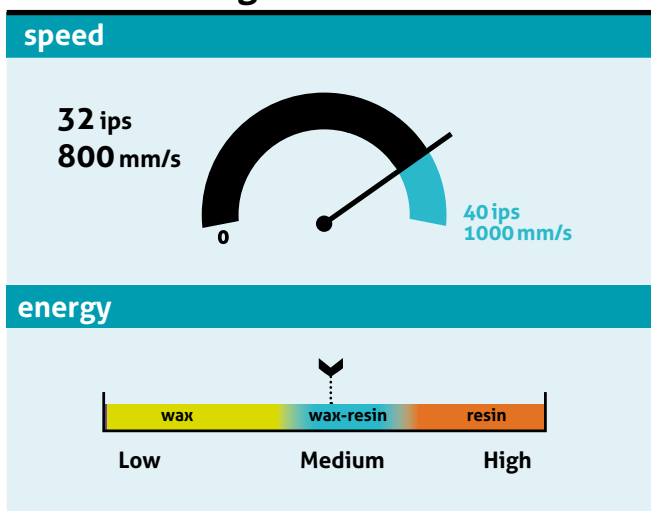

Print resistance

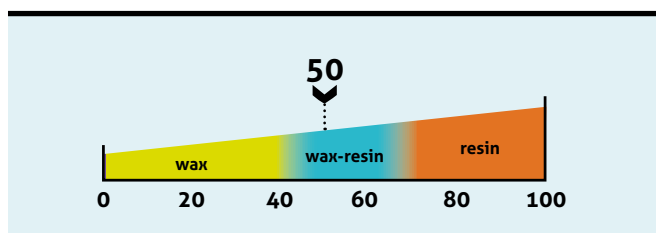

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions
UL 969

Your ribbon identity

Colours: ● ● ● ● ● ● ● ● ● ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact:



APR600

Application fields




Product performance

print quality					
90°Barcode	80	A _a Small characters	90	Logos	95
0°Barcode	100	2D Barcode	90	Blackness	2,2 ODR* <small>*Optical Density by Reflection, measured using a densitometer.</small>
technical resistances					
Heat	100°C 212°F <small>300°C 572°F</small>	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	70		

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax-Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

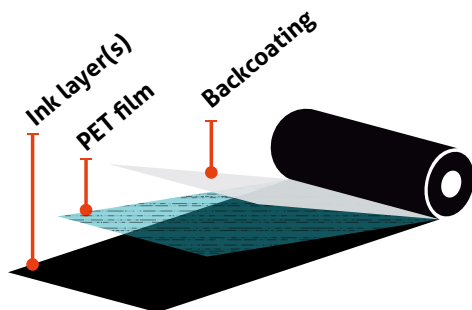

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.